

DY


双活塞旋转汽缸

Double-Piston Hydraulic Cylinder



HYDRAULIC CYLINDER

- Double piston Cylinder
- Actuate chucks with face drivers or parts ejectors and and proximity bracket
- 内装保险阀 (LOCK VALVE), 在发生停电等紧急情况时,
- 在必要时间保持电力输出, 确保安全性.
- 内装减压阀 (RELIEF VALVE),
- 能减缓因温度上升而造成的汽缸内的压力上升, 防止气缸破损.
- 最高液压为 40.8kg/cm², 汽缸的适用范围更大.

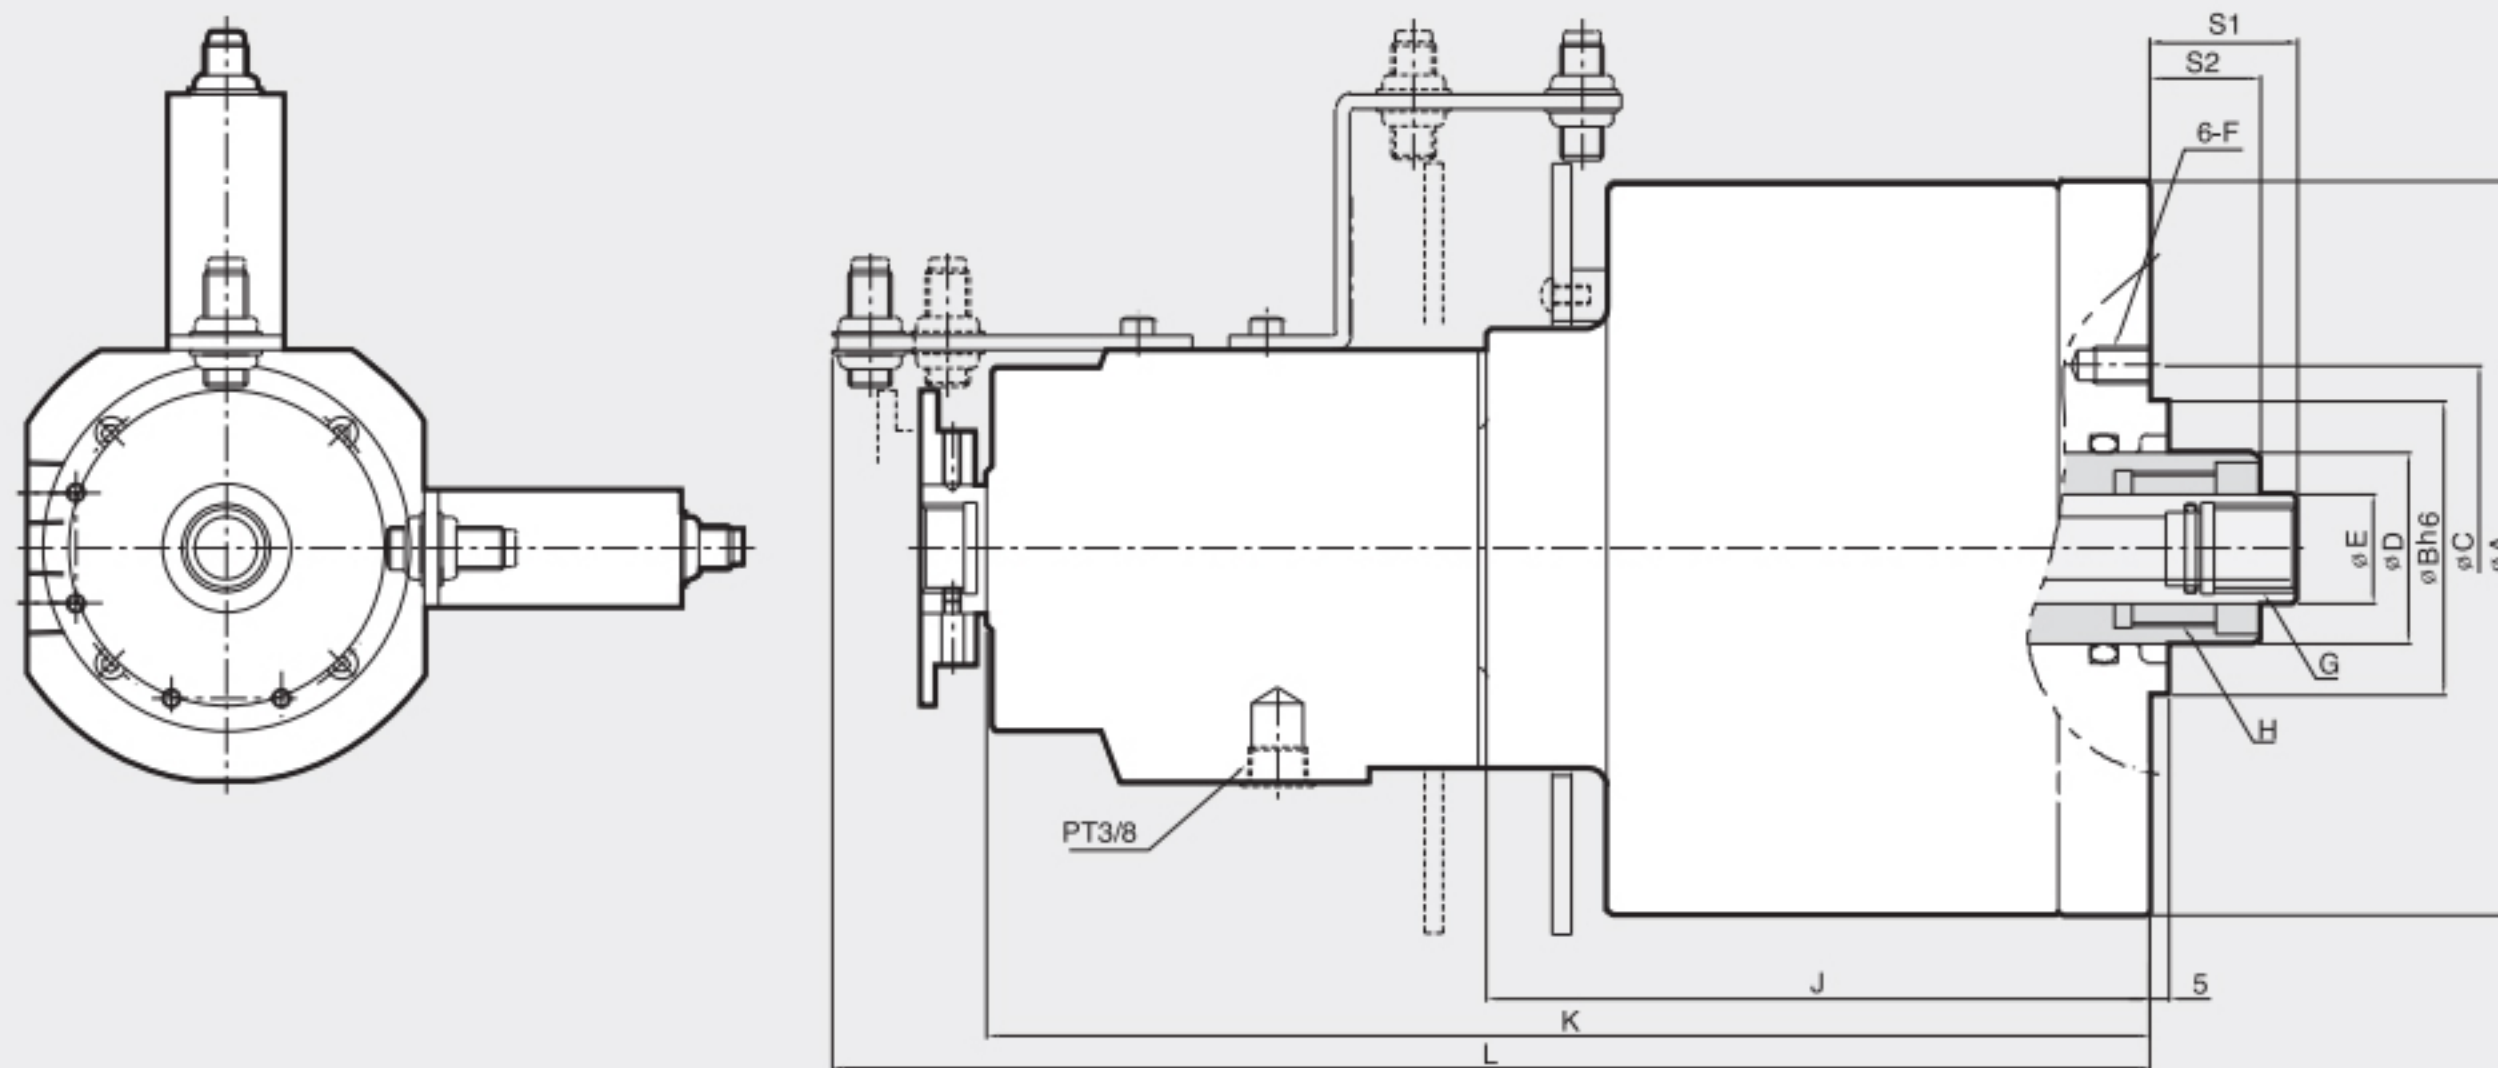

※ Piston A :
Piston B :

Dimensions

	ΦA	ΦB(h6)	ΦC	ΦD	ΦE	F	G	H	J	K	L
DY-12520	160	110	145	50	29	6-M12	M20°x1.5P	M42°x1.5P	178	299	341
DY-16030	200	80/110	100	52	30	6-M10	M24°x1.5P	M42°x1.5P	181	371	359

Specifications

Type	Piston Dia. 活塞直径 [mm]	Piston Area 活塞表面积 [cm ²]	Piston Stroke 活塞行程		Max. Operating Pressure 最大工作压力 [MPa(kgf/cm ²)]	Max. Speed 最大转速 [r.p.m.]	Weight 重量 [kgf]	GD ² 容许工作惯性 [N·m ² (kgf·m ²)]	
			Max.	Min.					
DY-12520	Piston A	125	102	49	34	40.8	5000	16.5	0.045
	Piston B	85	46	38	18				
DY-16030	Piston A	160	164	60	45	40.8	3000	24.5	0.3
	Piston B	85	46	48	18				

Rotary Cylinder